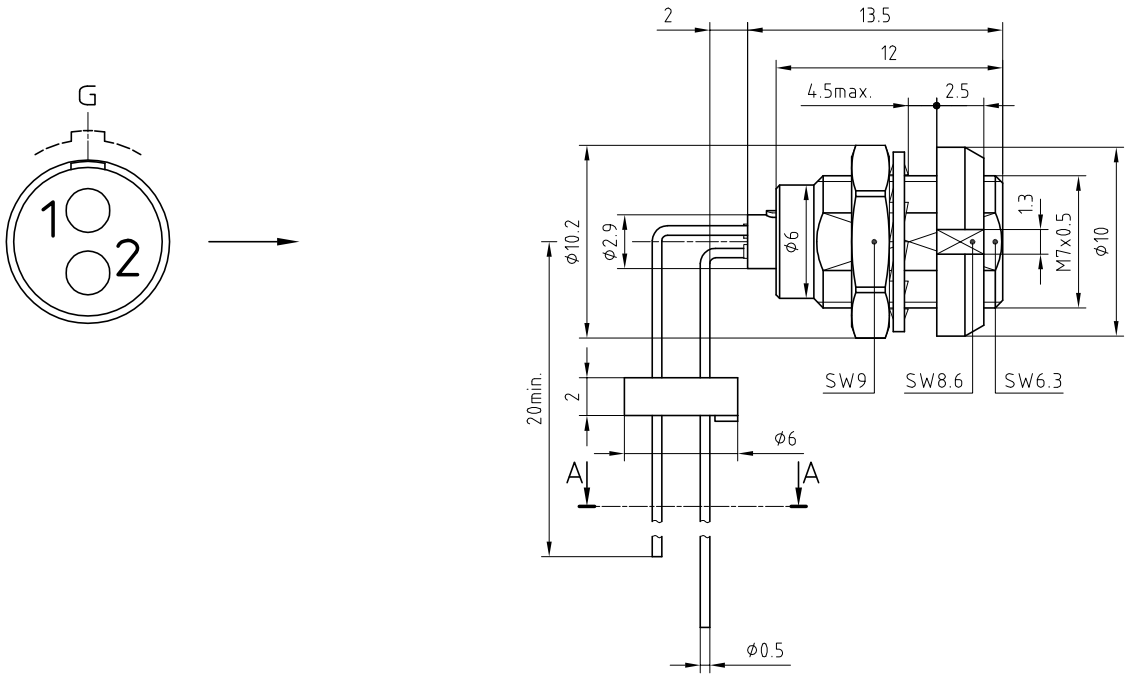

Outer shell	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Earthing crown	: Cu-Be (UNS C17300)	Nickel plated (FS-QQ-N-290A)
Insulator	: PEEK	-
Female contact	: Bronze (UNS C54400)	Gold plated (ISO 4523)
Notched nut	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Locking washer	: Bronze (UNS C52100)	Nickel plated (FS-QQ-N-290A)
Other metallic parts	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Contact wire	: Bronze (UNS C27400)	Tinned
Position insert	: FEP	-

Panel cut-out



Torque for mounting nut : 1 Nm

A-A cross-section (PCB drilling pattern)



Spanner for notched nut : DCH.91.101.PA

Fixed socket , with two nuts , with key (G) , with elbow (90°) contact for PCB . (Back panel mounting) . Series 00 , multipole (2)	Echelle	Dessiné	12.05.2006	OVU / RMO
	—	Contrôle	08.11.2011	JPBA/ATVI
ETUDE N° E9414		Modif.	01	08.11.2011/ OVU

LEMO SA CH-1024 Ecublens

ECG.00.302.CLV