

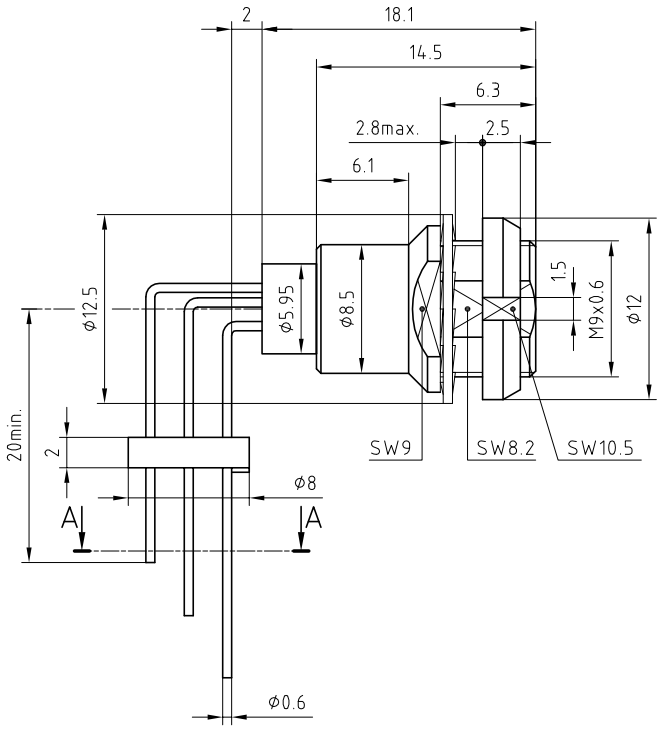

Outer shell	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Earthing crown	: Bronze (UNS C54400)	Nickel plated (FS-QQ-N-290A)
Insulator	: PEEK	-
Female contact	: Bronze (UNS C54400)	Gold plated (ISO 4523)
Clip	: Stainless steel	-
Notched nut	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Locking washer	: Bronze (UNS C52100)	Nickel plated (FS-QQ-N-290A)
Retaining ring	: PEEK	-
Other metallic part	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Contact wire	: Bronze (UNS C27400)	Tinned
Position insert	: FEP	-
Fixing resin	: Epoxy	-

Panel cut-out



Torque for mounting nut : 2.5 Nm

A-A cross-section (PCB drilling pattern)



Spanner for notched nut : DCH.91.121.PA

Fixed socket , nut fixing , with key (G) , with elbow (90°) contact for PCB . (Back panel mounting) . Series 0B , multipole (5)	Echelle —	Dessiné	10.12.1990	MKN / RMO
		Contrôle	08.06.2010	JPBA/ CDE
ETUDE N° E6158		Modif.	06	08.06.2010/ OVU
LEMO SA CH-1024 Ecublens		**EEG.0B.305.CLV**		