

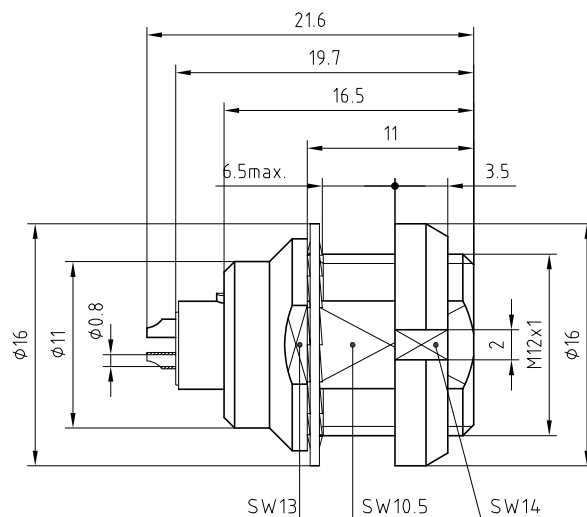




Outer shell	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Earthing crown	: Bronze (UNS C54400)	Nickel plated (FS-QQ-N-290A)
Insulator	: PEEK	-
Female contact	: Bronze (UNS C54400)	Gold plated (ISO 4523)
Notched nut	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Locking washer	: Bronze (UNS C52100)	Nickel plated (FS-QQ-N-290A)
Other metallic part	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)

Panel cut-out



Torque for
mounting
nut : 4.5 Nm

Spanner for notched nut : DCH.91.161.PA

Fixed socket with nut fixing , with key (G) ,
(Back panel mounting) .
Series 1B , multipole (4)

ETUDE N° E1621

Echelle

Dessiné 21.10.2010 OVU / JPBA

Contrôle 21.10.2010 JPBA / ATVI

Modif. 00 21.10.2010 / OVU



LEMO

CH-1024 Ecublens

EEG.1B.304.CLL