

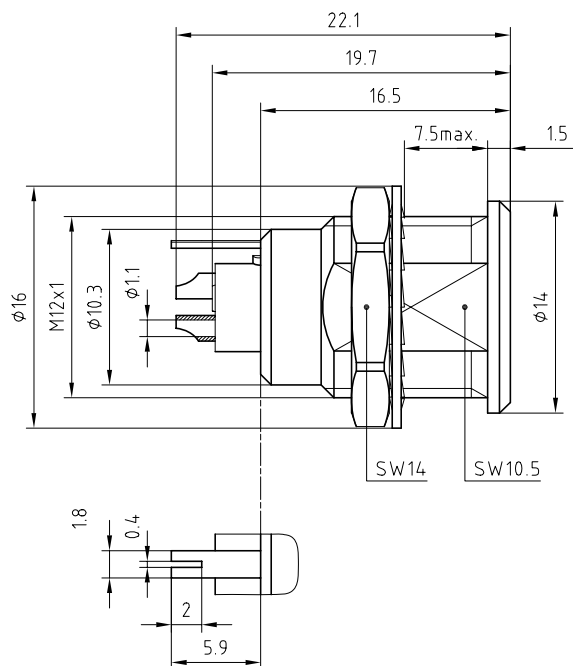




Outer shell	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Earthing crown	: Bronze (UNS C54400)	Nickel plated (FS-QQ-N-290A)
Insulator	: PEEK	-
Female contact	: Bronze (UNS C54400)	Gold plated (ISO 4523)
Earthing tag	: Brass (UNS C38500)	Gold plated (ISO 4523)
Locking washer	: Bronze (UNS C52100)	Nickel plated (FS-QQ-N-290A)
Other metallic part	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)

Panel cut-out



Torque for
mounting
nut : 4.5 Nm

Spanner for nut : DCA.91.201.4TN or
Spanner for nut : DCG.91.201.4TN

Fixed socket with earthing tag , nut fixing , with key (G) ,
Series 1B , multipole (2)

ETUDE N° E1075

Echelle

—

Dessiné	24.03.06	OVU / RMO
Contrôle	24.03.06	RMO / CDE
Modif.	00	24.03.06 / OVU



LEMO

CH-1024 Ecublens

ENG.1B.302.CLL