



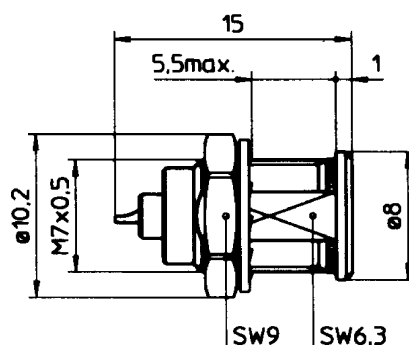

Outer shell	: Brass (UNS C38500)	Chrome plated (FS-00-C-320B)
Earthing crown	: Cu-Be (UNS C17200)	Nickel� (FS-00-N-290A)
Insulator	: PTFE	
Female contact	: Bronze (UNS C54400)	Gold plated (MIL-G-45204C Type I Class1)
Locking washer	: Bronze (UNS C52100)	Nickel plated (FS-00-N-290A)
Other metallic parts	: Brass (UNS C38500)	Nickel plated (FS-00-N-290A)

Panel hole



Torque for
mounting
nut : 1 Nm

Fixed socket , nut fixing .
Series 00 , coax (50 )

Echelle —	Dessin�	29.10.98	O.V / JCH
	Contr�le	31.08.01	R.M / RM
	Modif.	01	31.08.01 / O.V

ETUDE N 



LEADER

CH-1024 Ecublens

ERA.00.250.CTL