


Shell	: PSU	White
Latch sleeve	: Special brass	Nickel plated (FS-QQ-N-290A)
Collet nut	: PSU	White
Insulator	: PEEK	
Male contact	: Brass (UNS C38500)	Gold plated (MIL-G-45204C Type I Class1)
Other metallic parts	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Strain relief	: Polyurethan	Various colors

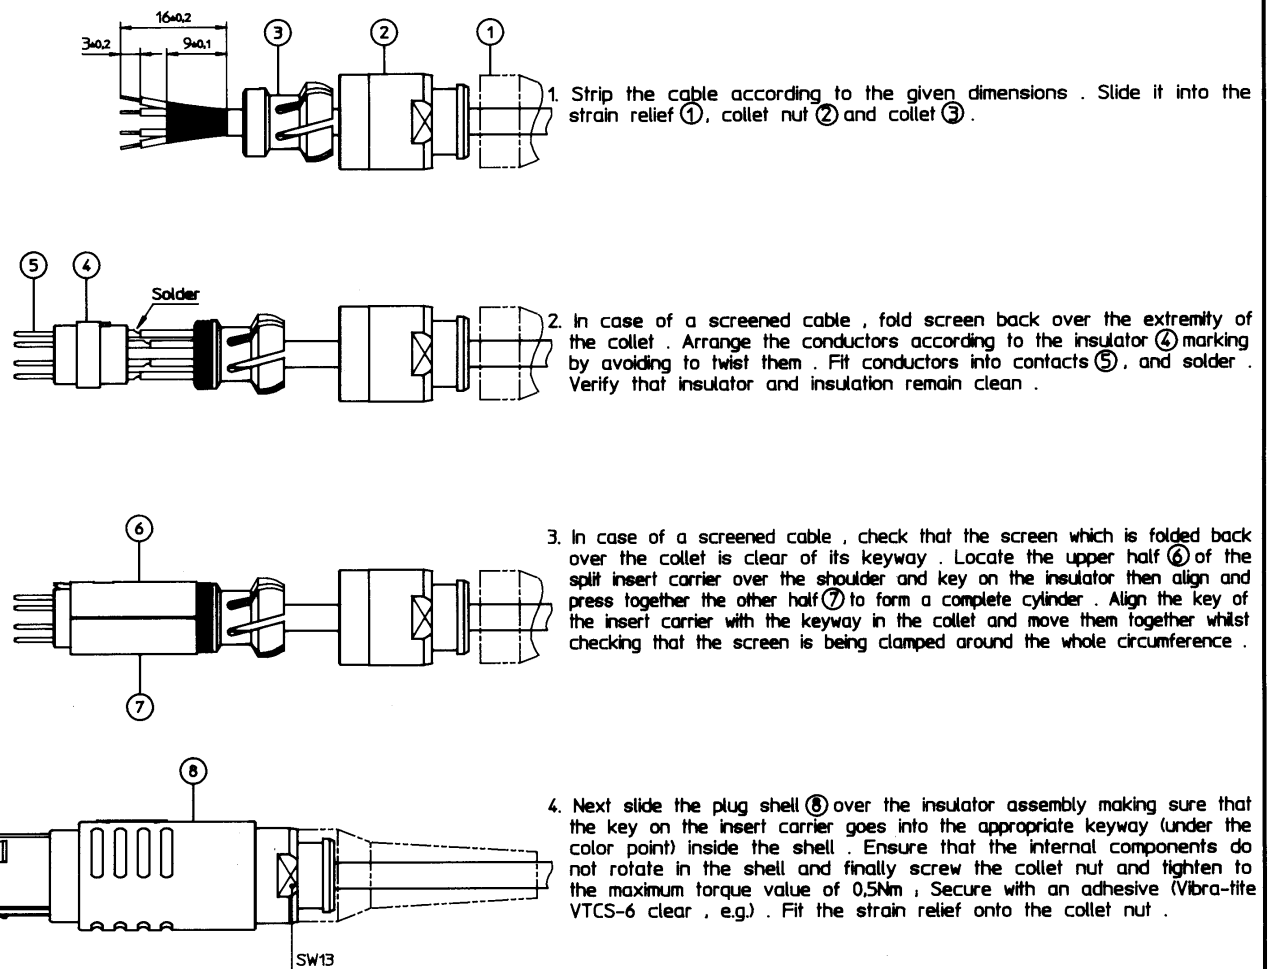

**Straight plug with keys (Y) , cable collet and nut for strain relief .
Serie 2B , multipole (16)**

ETUDE N°

Echelle

Dessiné 21.05.96 O.V / M.K

Contrôle 21.05.96 *J.M.*

Modif. 00 21.05.96 / O.V

LEMO

1024 Ecublens



FGY.2B.316.PLAD9BZ